

Diamond Lath

An easy-to-fix lath providing a secure key for plaster and render applications as well as offering effective joint and crack reinforcement. In addition, Diamond Lath can be used as part of a fire protection system for structural steel work.

Material

Galvanised steel to BSEN 10327-DX51D+Z275 for internal use.

Stainless steel to BSEN 10088-2-1.4301 for external use and conditions of heavy condensation or persistent damp.


Complies with BS 1369 Part 1: 1987 specification for expanded metal and ribbed lathing.

Installation

Fixing should be in accordance with BS 5492: 1990 Code of Practice for Internal Plastering and BS 5262: 1991 Code of Practice for External Renderings Refer to page 15 for installation guidelines.

Code	Min material weight (kg/m ²)	Material	Qty	Min Sheet weight (kg)	Sheet Size (mm)	Use
DL089*	0.89	Galvanised Steel	10	1.55	2500 x 700	Ⓘ
DL111*	1.11	Galvanised Steel	10	1.94	2500 x 700	Ⓘ
DL161	1.61	Galvanised Steel	10	2.82	2500 x 700	Ⓘ
DL111S*	1.11	Stainless Steel	1	1.94	2500 x 700	Ⓔ

*Not recommended for ceiling applications.

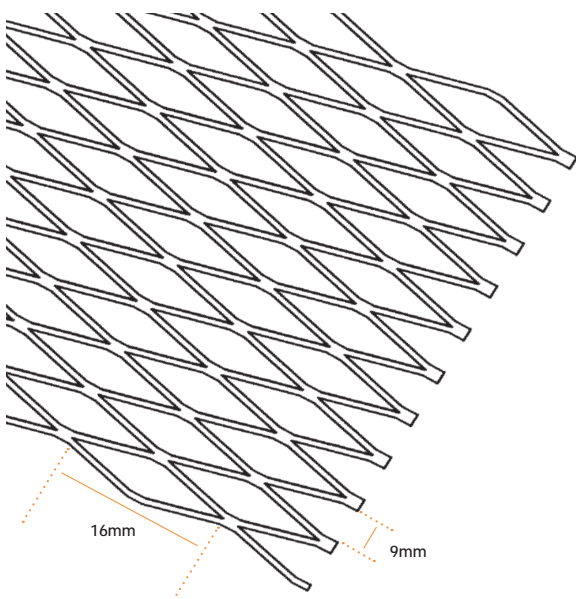

Coil Lath

Code	Width mm	Length m	Use
CL021/100/100	100	100	Ⓘ
CL021/150/100	150	100	Ⓘ
CL021/200/100	200	100	Ⓘ

*All Coil Lath is made to order